


装飾用ねじり規格表

角鋼 サイズ	全長	A直部 (mm)	ネジリ部		B直部 (mm)
			ピッチ数	ねじり長 (mm)	
9.52mm 1ピッチ= 33mm	900	100	21	693	107
	1,100		28	924	76
	1,370		36	1,188	82
	1,830		50	1,650	80
	2,750		78	2,574	76
	5,500		161	5,313	87
13mm 1ピッチ= 44mm	900	100	16	704	96
	1,100		21	924	76
	1,370		27	1,188	82
	1,830		37	1,628	102
	2,750		58	2,552	98
	5,500		121	5,324	76
16mm 1ピッチ= 55mm	900	100	13	715	85
	1,100		17	935	65
	1,370		21	1,155	115
	1,830		30	1,650	80
	2,750		46	2,530	120
	5,500		96	5,280	120
19mm 1ピッチ= 65mm	900	100	11	715	85
	1,100		14	910	90
	1,370		18	1,170	100
	1,830		25	1,625	105
	2,750		39	2,535	115
	5,500		81	5,265	135
22mm 1ピッチ= 75mm	900	100	—	—	—
	1,100		12	900	100
	1,370		15	1,125	145
	1,830		22	1,650	80
	2,750		34	2,550	100
	5,500		70	5,250	150
25mm 1ピッチ= 86mm	900	100	—	—	—
	1,100		10	860	140
	1,370		13	1,118	152
	1,830		19	1,634	96
	2,750		29	2,494	156
	5,500		61	5,246	154
28mm 1ピッチ= 96mm	900	100	—	—	—
	1,100		9	864	136
	1,370		12	1,152	118
	1,830		17	1,632	98
	2,750		26	2,496	154
	5,500		55	5,280	120
32mm 1ピッチ= 110mm	900	100	—	—	—
	1,100		8	880	120
	1,370		10	1,100	170
	1,830		15	1,650	80
	2,750		23	2,530	120
	5,500		48	5,280	120
38mm 1ピッチ= 130mm	900	100	—	—	—
	1,100		7	910	90
	1,370		9	1,170	100
	1,830		12	1,560	170
	2,750		20	2,600	50
	5,500		41	5,330	70
44mm 1ピッチ= 150mm	900	100	—	—	—
	1,100		6	900	100
	1,370		8	1,200	70
	1,830		11	1,650	80
	2,750		17	2,550	100
	5,500		36	5,400	100
50mm 1ピッチ= 170mm	900	100	—	—	—
	1,100		5	850	150
	1,370		7	1,190	80
	1,830		9	1,530	200
	2,750		15	2,550	100
	5,500		31	5,270	130



左記はSS400角鋼ねじり規格となります。
表記以外の寸法でのねじりも可能です。(なお、直部寸法について■9.52mm～19mmサイズでは自由設定可能ですが、22mm以上の場合表中の寸法に固定されますので、ご了承下さい。)
また、ステンレス・アルミ角棒も加工致しておりますので、詳細は下記へお問い合わせ下さい。

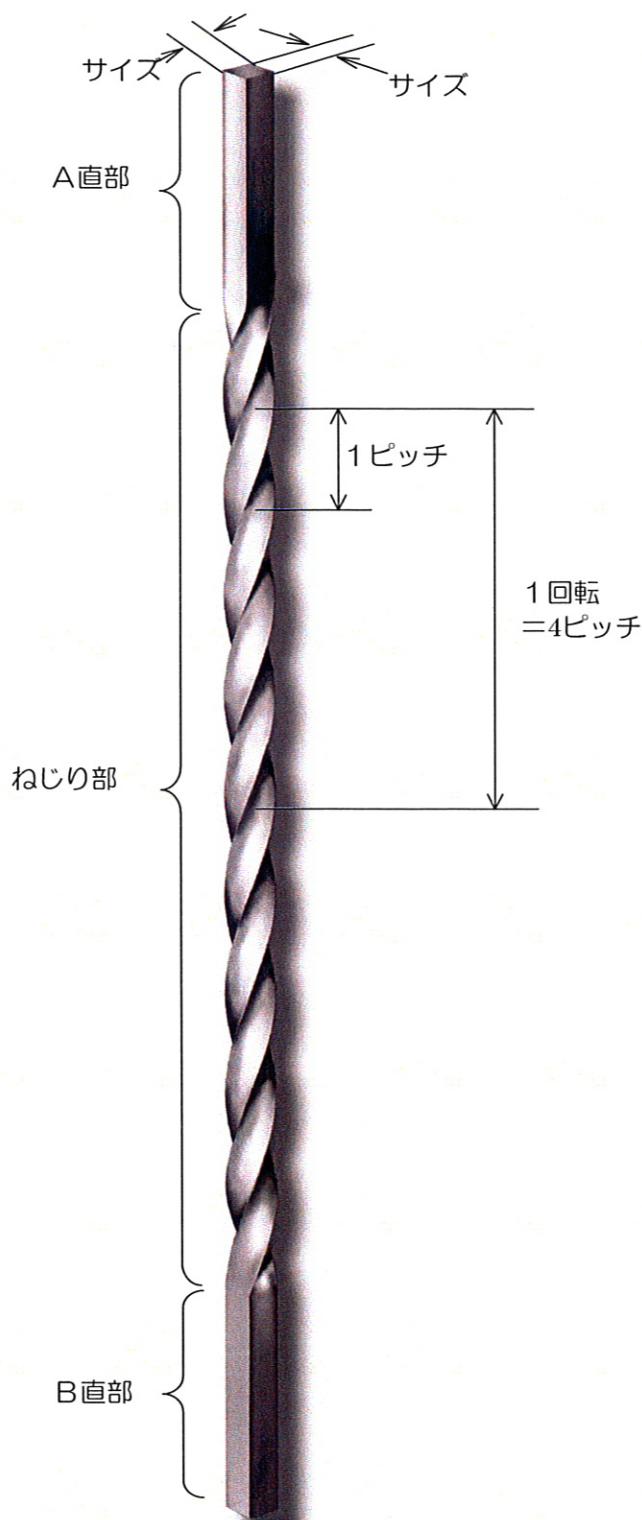

企画・設計・施工
GT・スパイラル 有限会社

TEL 096-211-1517
FAX 096-211-1518
e-mail info@gt-spiral.com